WANLONGCABLE

PROFESSIONAL CABLE MANUFACTURER

GJXH

Hangzhou Lin'an Wanlong Cable Co., Ltd

317 Jintian Road, Lin'an, Hangzhou, China 311300

Mob:+86-13968032911 Tel:+86-571-61078177


Fax:+86-571-61078123

Website: www.wanlongcable.cn

E-mail: wanlongcable@hotmail.com wanlongcable2@outlook.com

PRODUCT DESCRIPTION:

The optical fiber(s) is placed in the center. Two parallel steel wires are placed at two sides. Then the cable is completed with LSZH sheath.

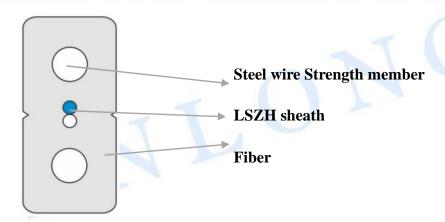

CHARACTERISTICS:

Rending Radius

- •Simple structure, light weight and high tensile strength.
- •Novel groove design, easily strip and splice, simplify the installation and maintenance.
- •Low smoke, zero halogen and flame-retardant sheath, environment-friendly, good Safety.

Denuing Kaulus	Static TOXD Dynamic20XD			
Storage/Operating Temperature		-20°C~+60°C		
Cable Type	GJXH-1B6a2			GJXH-2B6a2
Cable Diameter(mm)	$(2.0\pm0.1)\times(3.0\pm0.1)$		(2.0	$0\pm0.1)\times(3.0\pm0.1)$
Cable Weight(kg/km)	10.5-			10.5-
Tensile Strength Long/Short Term(N)	100/200			100/200
Crush Resistance Long/Short Term(N/100mm)	1000/2200			1000/2200



Static 10xD

Dynamic 20xD