

WANLONG CABLE

PROFESSIONAL CABLE MANUFACTURER

GYXTC8Y

Hangzhou Lin'an Wanlong Cable Co., Ltd

317 Jintian Road, Lin'an, Hangzhou, China 311300

Mob:+86-13968032911 Tel:+86-571-61078177


Fax:+86-571-61078123

Website: www.wanlongcable.cn

E-mail: wanlongcable@hotmail.com wanlongcable2@outlook.com

PRODUCT DESCRIPTION:

PBT for the middle-casing, and 12(or 11 or 10 or 9 or 8) high-strength steel (or sets of plastic steel wire) strands in uniform-casing around, PE jacket, and with Strand (or wire) parallel 8 fonts placed at the same time squeezing into cable sheathing.

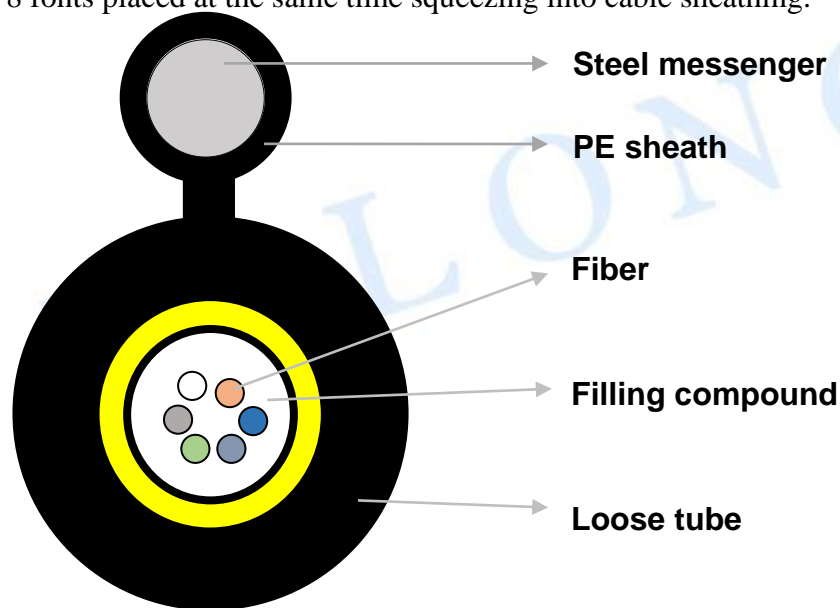

CHARACTERISTICS:

- Reasonable design and precise control over the loose-tube fiber in the remainder of a long, fiber optic cable with excellent performance and temperature tensile properties.
- No need another release strand when set up, the rate of increase of 3-4 times.
- Core cable filled ointment to ensure that the vertical water blocking effect.

Bending Radius	Static 10xD	Dynamic 20xD
Storage/Operating Temperature	-40°C~+60°C	

WANLONG CABLE

WANLONG CABLE

PROFESSIONAL CABLE MANUFACTURER

GYXTC8Y

Hangzhou Lin'an Wanlong Cable Co., Ltd

317 Jintian Road, Lin'an, Hangzhou, China 311300

Mob:+86-13968032911 Tel:+86-571-61078177

Fax:+86-571-61078123

Website: www.wanlongcable.cn

E-mail: wanlongcable@hotmail.com wanlongcable2@outlook.com

Cable Type increased by 2 fibers	GYXTC8Y 2-12Cores
Fiber Count	2-12
Steel(mm)	1.5
Loose Tube Size	2.0/2.2
Cable Diameter(mm)	5.0-
Cable Weight(kg/km)	40-
Tensile Strength Long/Short Term(N)	400/1000
Crush Resistance Long/Short Term(N/100mm)	1000/2000