

WANLONG CABLE

PROFESSIONAL CABLE MANUFACTURER

GYXY

Hangzhou Lin'an Wanlong Cable Co., Ltd

317 Jintian Road, Lin'an, Hangzhou, China 311300

Mob:+86-13968032911 Tel:+86-571-61078177


Fax:+86-571-61078123

Website: www.wanlongcable.cn

E-mail: wanlongcable@hotmail.com wanlongcable2@outlook.com

PRODUCT DESCRIPTION:

Jelly filled and fiber contained central loose tube with two parallel steel wires. Protecting by outer sheath wrapped vertically.

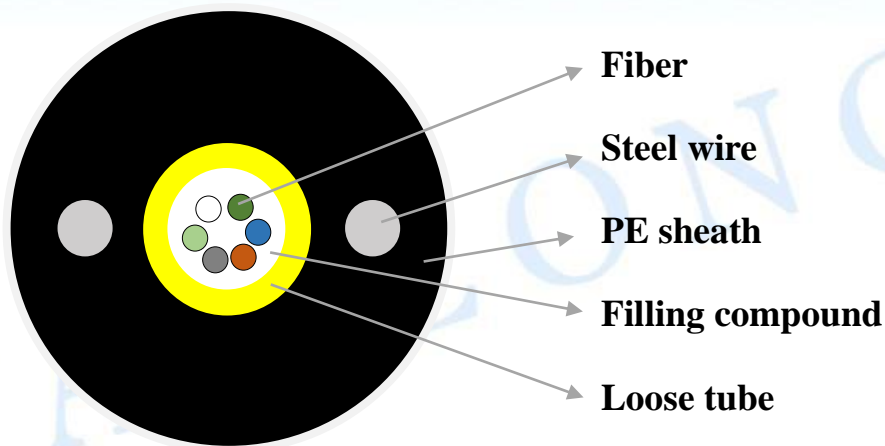

CHARACTERISTICS:

- Reasonable design and precise control over the loose-tube fiber in the remainder of a long fiber optic cable with excellent performance and temperature tensile properties.
- High strength loose tube that is hydrolysis resistant and special tube filling compound ensure a critical protection of fiber.
- Specially designed compact structure is good at preventing loose tubes from shrinking.
- Crush resistance and flexibility.
- Two parallel steel wires ensure tensile strength; PE sheath protects cable from ultraviolet radiation.
- Small diameter, light weight and installation friendliness long delivery length.
- Wire-side pressure Armored excellent performance and a bullet-proof capability

Bending Radius	Static 10xD	Dynamic 20xD
Storage/Operating Temperature	-40°C~+60°C	

WANLONG CABLE

WANLONG CABLE

PROFESSIONAL CABLE MANUFACTURER

GYXY

Hangzhou Lin'an Wanlong Cable Co., Ltd

317 Jintian Road, Lin'an, Hangzhou, China 311300

Mob:+86-13968032911 Tel:+86-571-61078177

Fax:+86-571-61078123

Website: www.wanlongcable.cn

E-mail: wanlongcable@hotmail.com wanlongcable2@outlook.com

Cable Type increased by 2 fibers	GYXY-2-8 Cores	GYXY-10-12Cores
Fiber Count	2-8	10-12
Steel Wire	0.9/1.0	0.9/1.0
Loose Tube Size	2.1	2.2
Cable Diameter(mm)	7.2-	7.2-
Cable Weight(kg/km)	50-	50-
Tensile Strength Long/Short Term(N)	600/1500	600/1500
Crush Resistance Long/Short Term(N/100mm)	300/1000	300/1000