

WANLONG CABLE

PROFESSIONAL CABLE MANUFACTURER

5C-2V

Hangzhou Lin'an Wanlong Cable Co., Ltd

317 Jintian Road, Lin'an, Hangzhou, China 311300

Mob:+86-13968032911 Tel:+86-571-61078177

Fax:+86-571-61078123

Website: www.wanlongcable.cn

E-mail: wanlongcable@hotmail.com wanlongcable2@outlook.com

CENTER CONDUCTOR: 1.0 ± 0.01 MM BARE COPPER OR COPPER CLAD STEEL

DIELECTRIC:

GAS EXPANDED POLYETHYLENE

NOMINAL DIAMETER OVER DIELECTRIC: 4.70 ± 0.02 MM

SHIELD:

1st SHIELD: ALUMINUM FOIL

NON-BONDED/BONDED

2nd SHIELD: BARE ALUMINUM BRAID WIRE

40%-90% COVERAGE

JACKET:

PVC JACKET

NOMINAL DIAMETER OVER JACKET: 6.80 ± 0.1 mm


ELECTRICAL PROPERTIES:

IMPEDANCE: 75.0 ± 3.0 Ohms

CAPACITANCE: 70 ± 3 (pF/m)

VELOCITY OF PROPAGATION: 85.0% NOMINAL

RETURN LOSS: 20dB min (5-200MHz)

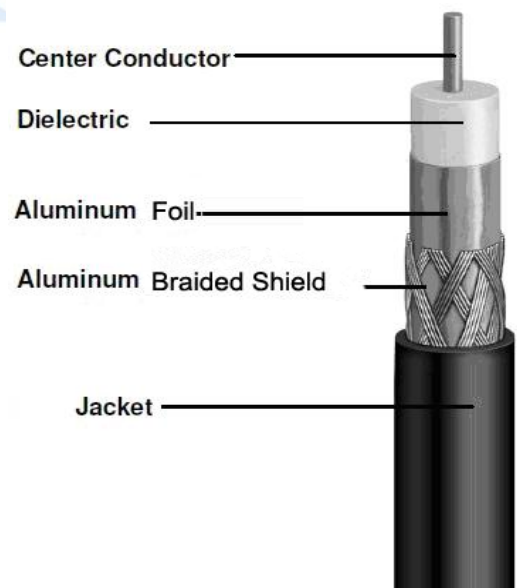

WANLONG CABLE

PROFESSIONAL CABLE MANUFACTURER

5C-2V

Hangzhou Lin'an Wanlong Cable Co., Ltd

317 Jintian Road, Lin'an, Hangzhou, China 311300

Mob:+86-13968032911 Tel:+86-571-61078177

Fax:+86-571-61078123

Website: www.wanlongcable.cn

E-mail: wanlongcable@hotmail.com wanlongcable2@outlook.com

ATTENUATION @ 68°F (20°C):

@ Frequency MHz	dB/100 ft. (MAX.)	dB/100 meters (MAX.)
5 MHz	0.58 dB	2.65 dB
55 MHz	1.60 dB	5.25 dB
83 MHz	1.95 dB	6.40 dB
187 MHz	2.85 dB	9.35 dB
211 MHz	3.05 dB	10.00 dB
250 MHz	3.30 dB	10.82 dB
300 MHz	3.55 dB	11.64 dB
350 MHz	3.85 dB	12.63 dB
400 MHz	4.15 dB	13.61 dB
450 MHz	4.40 dB	14.43 dB
500 MHz	4.66 dB	15.29 dB
550 MHz	4.90 dB	16.08 dB
600 MHz	5.10 dB	16.73 dB
750 MHz	5.65 dB	18.54 dB
865 MHz	6.10 dB	20.01 dB
1000 MHz	6.55 dB	21.49 dB